




GAS CAN INSTRUCTIONS

- Put Teflon tape around gas can threads (1) to create gasket prior to installation to prevent air leaks.

- Screw adapter on firmly and completely (2)
 - Assemble tubes and place firmly in pump - see page 4 of instruction manual
 - Screw drum seal expander clockwise until the pump doesn't move (about 1 – 1 ½ turns) (3)
 - Pressurize your container with piston (4).
 - 3 - 4 pumps on the piston should prime the fluids for dispensing.
 - Exercise extreme caution when pressurizing your container
 - Relieve pressure with pressure relief valve when not in use. See instruction manual – page 8.

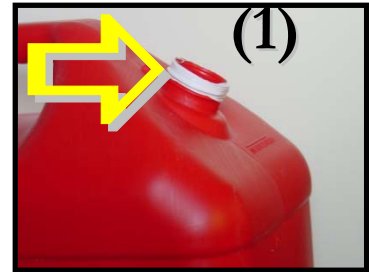

Gasoline is extremely flammable and must be handled with caution. Vapors can explode. Exercise extreme caution when pressurizing your container. Keep out of reach of children.

Westcott
Distribution



184 West Tenth Street, New York, 10014
Voice (646) 486 3636 Fax (212) 243 6070

3/29/04